


TRA008 Working Doors



Glue the door frames on each side of the door opening. Make sure you make the frames flush with the opening otherwise you will have trouble installing the next pieces.

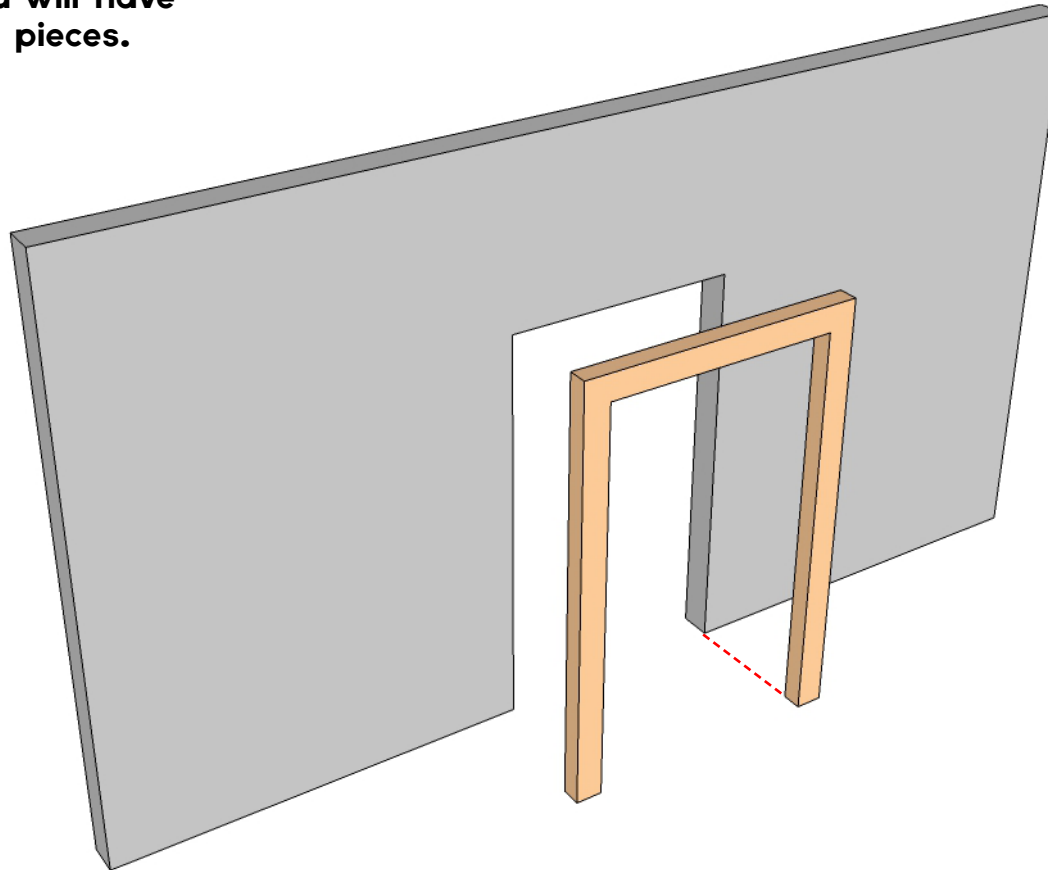


TRA008 Working Doors



Be aware of the location of the hole in the bottom plate. If you install the hole on the left the door will swing to the left, if you install it on the right, the door will swing to the right.

The bottom door plate should sit between the existing door opening and the door frames. It should be flush

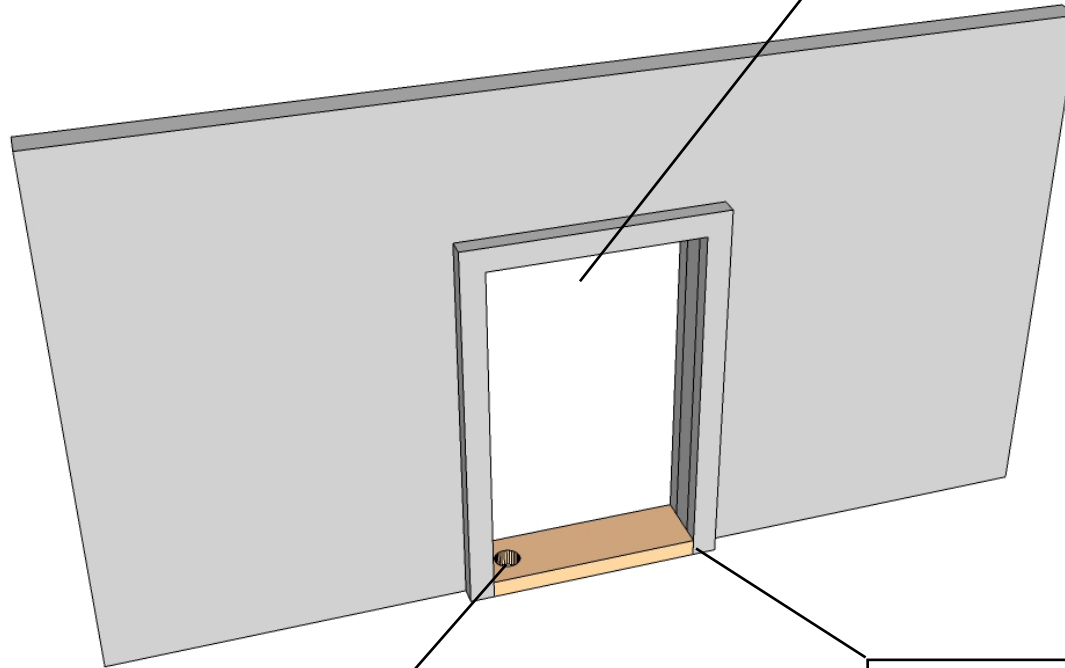

Make sure the door plate is flush on the outside and inside




When you are applying glue to the bottom of the door plate, be careful not to get glue in the hole ... otherwise you will glue the door in place and it won't open!

TRA008 Working Doors



This step is fiddly and requires patience and careful movements. Place the top door plate so that the hole is over the peg on the door and hold it in the alignment shown.

Working on an angle and whilst holding the door and the top plate together, put the lower peg in the lower hold and rotate the door and the door plate up into the door frames.

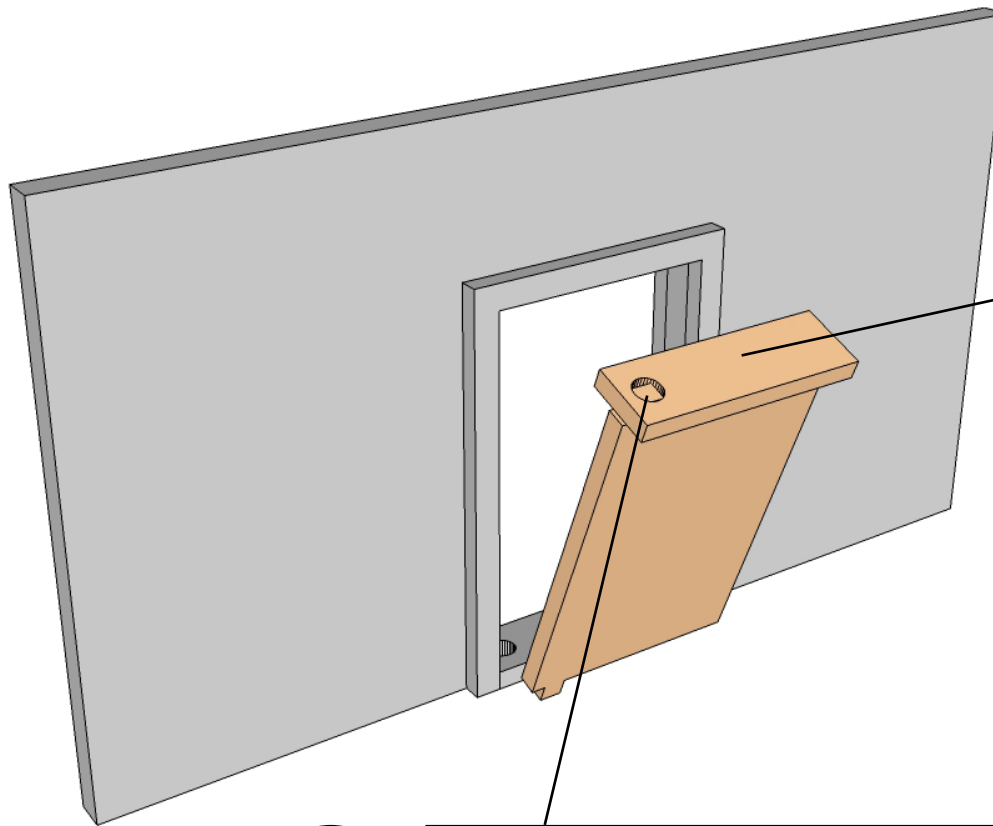

You might find it useful to apply glue to the door plate before placing it on to the peg on the door



Again, be mindful of the hole and keeping it free of glue